

Setting up your Windows PC or Laptop to Print with your Ricoh Copier Using Ricoh Device Software Manager

Last Updated: 05/25/23

1. Go to:
http://support.ricoh.com/bb/html/dr_ut_e/rc2/model/device_software_manager/device_software_manager.htm?lang=en
2. Confirm the version of the operating system (“Your OS”) running on your PC.

Device Software Manager

 Important Notice **Important**




Your OS

Microsoft Windows 10 (64-bit)

[Choose other OS](#)

Note Before installing, please visit the link below for important information about Windows drivers.
https://www.ricoh.com/info/2020/0122_1/

Select driver language

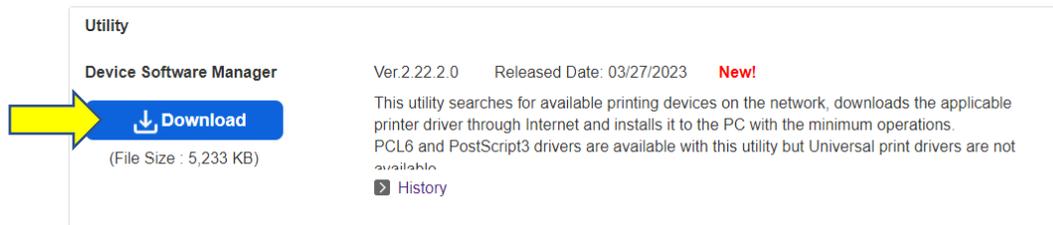

Utility


Device Software Manager Ver.2.22.2.0 Released Date: 03/27/2023 **New!**

[Download](#)
(File Size : 5,233 KB)


This utility searches for available printing devices on the network, downloads the applicable printer driver through Internet and installs it to the PC with the minimum operations.
PCL6 and PostScript3 drivers are available with this utility but Universal print drivers are not available.

History


3. After clicking Download, you will see the downloaded file appear in the left side of the task bar at the bottom of the screen. When the download is complete (as shown), click the up arrow and select "Open"

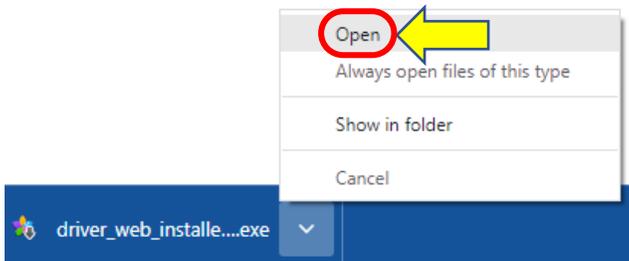


4. Ensure "Run Driver Installer after installation" is checked and click "Accept Agreement and Install"

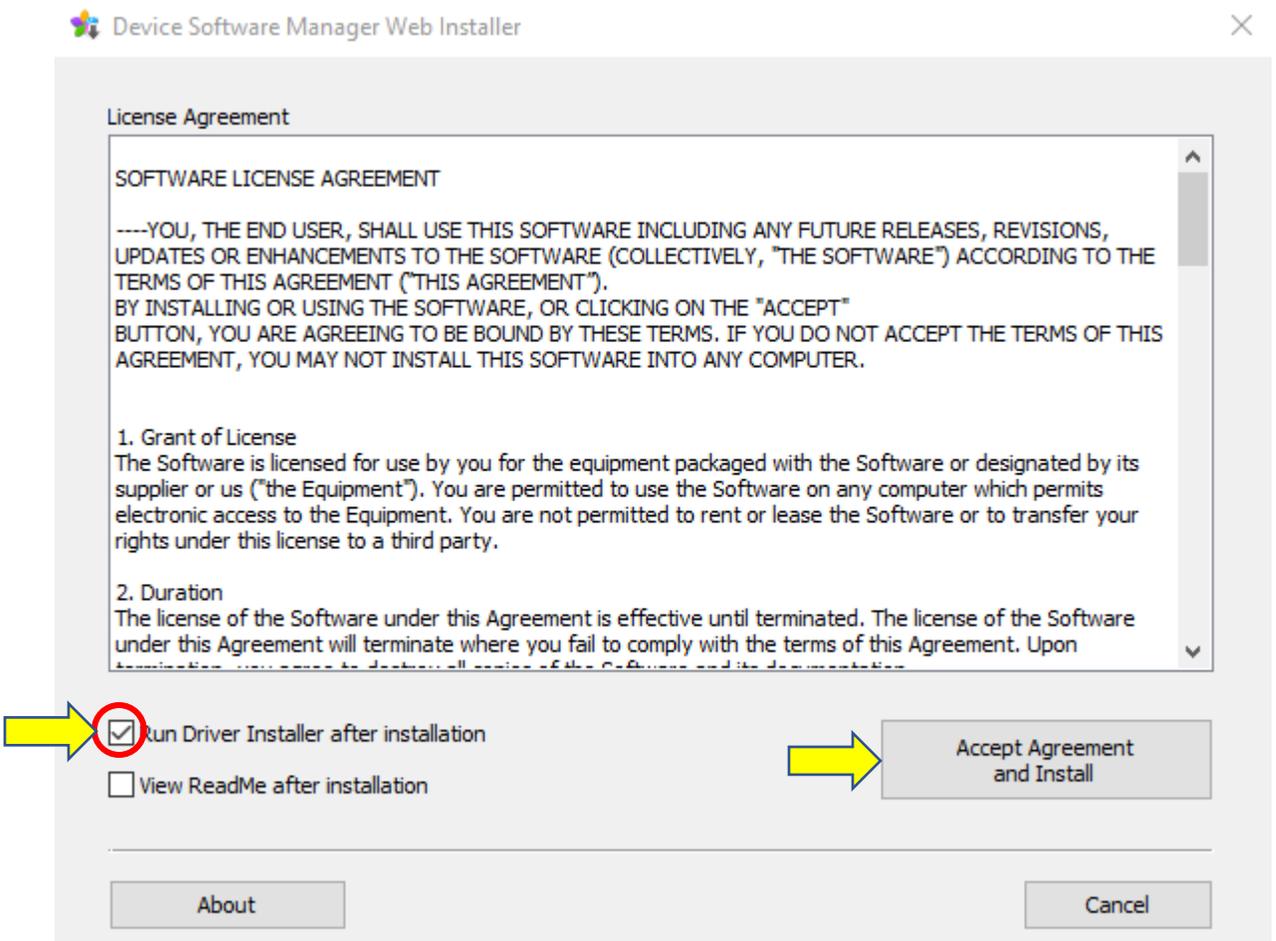


5. Walk through the steps in the Manager Setup Wizard
Click "Next"

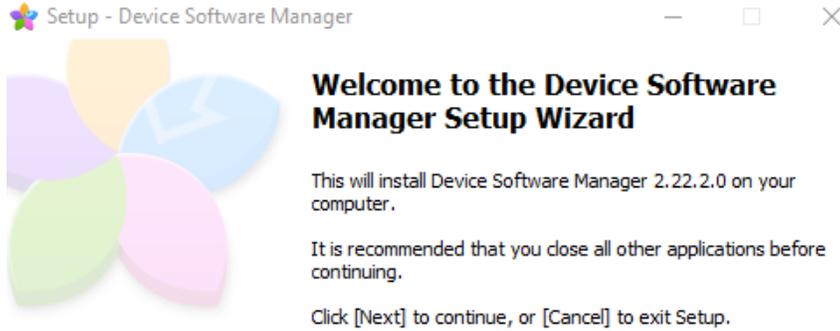


- Click "Agree and Go to Next"

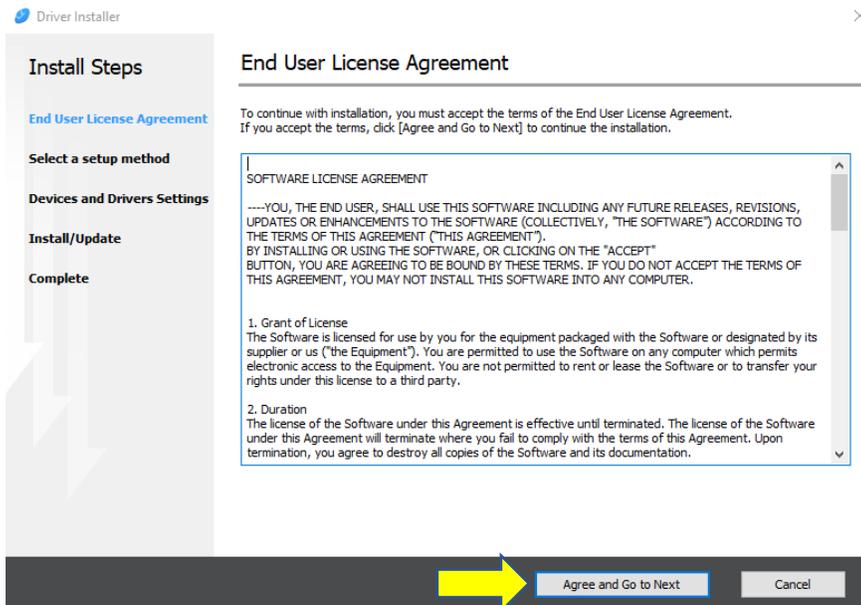

Select "Network" and click "Next"

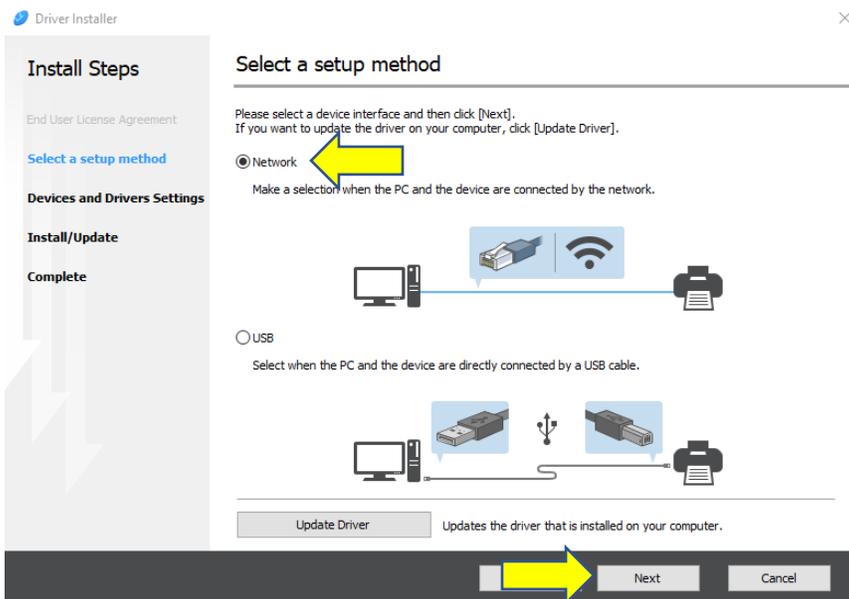

Select the Device Name (copier) found on the network:

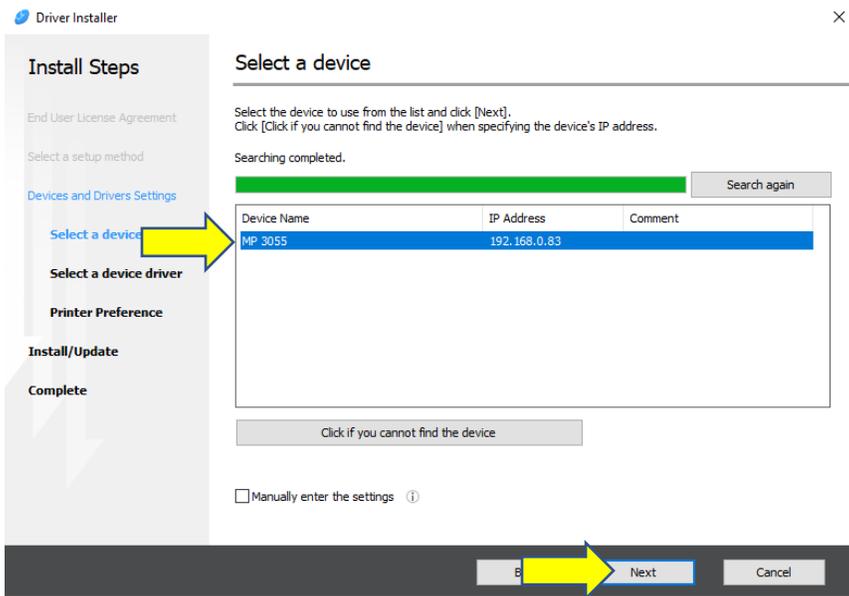

Driver Installer ✕

Install Steps

- End User License Agreement
- Select a setup method
- Devices and Drivers Settings
- Install/Update**
 - Install
 - Complete**

Install

Searching for installable driver. Please wait...
MP 3055



Cancel

Driver Installer ✕

Install Steps

- End User License Agreement
- Select a setup method
- Devices and Drivers Settings
- Install/Update**
 - Install
 - Complete**

Install


Installing the driver...
RICOH MP 3055 PCL 6




Cancel

Once the driver install completes, click “Print Test Page” to test the copier.

Then click “Check/Change Print Settings” to set the printing defaults.

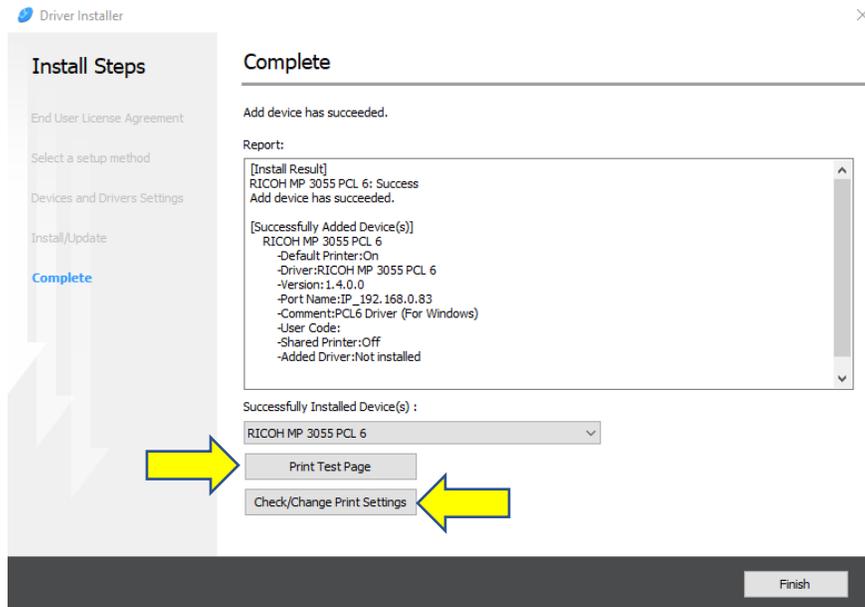

Choose default settings and click “OK”

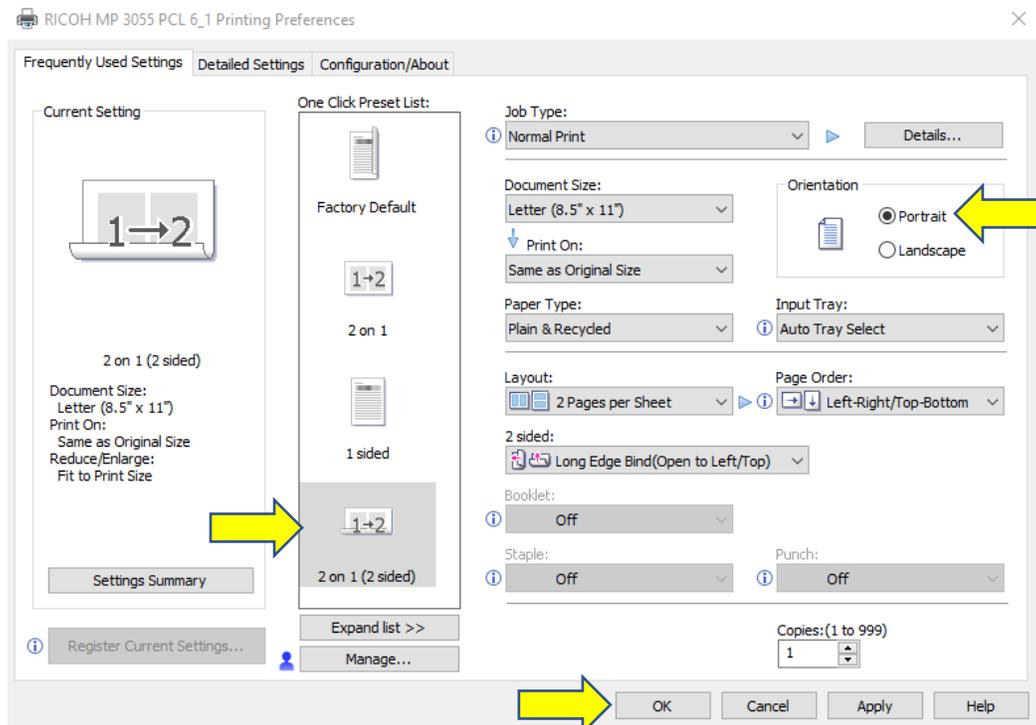

6. To restart the process (e.g. to update the driver), click the Windows logo in the bottom left corner of the screen and re-start at step 5.

